

UC-S106

SATA to SATA

Mobile Rack

User's Manual



Index

Package content	Page 1
Product illustration	Page 2
Feature & Specification	Page 3
Installation	Page 4
Caution	Page 5

Package content:

1. Mobile rack *1

2. User's Manual *1

3. Accessory kit:

a. Security key *1

b. Screws for HDD *4 (#6-32UNC)

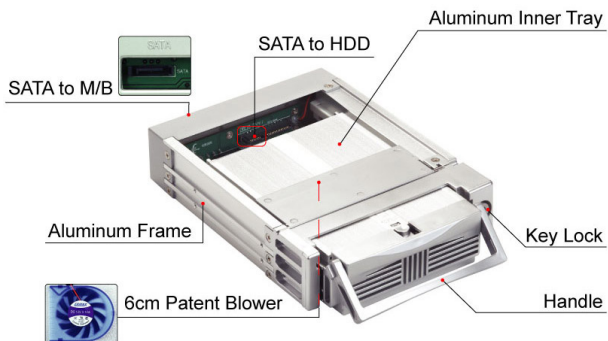
c. Screws for mobile rack *4 (M3 * 0.5)



#6-32UNC M3 * 0.5

Product illustration

UC-S106









Feature:

1. Support 3.5" SATA HDD
2. Data transfer rate is up to 150 MB/sec
3. Plug & play with hot-swap ready
4. Aluminum design for the best effective heat dissipation
5. Built-in a patent blower in the bottom offering the extra solution of heat dissipation
6. Unique easy in / out handle design for the inner tray
7. "Key Lock" design to secure your HDD

Specification

Application	3.5" SATA HDD
Material	Aluminum /ABS
Interface	SATA to SATA
Data transfer rate	150 MB/sec
DC input	4-pin power connector
LED indicator	2 (Power & HDD)
Cooling fan	6 cm blower *1 (bottom)
Product dimensions (D*W*H)	224*148*42 mm

Installation

 1. Turn off the key lock and take out inner box.	 2. Open the upper cover and connect the SATA power pin header with SATA HDD.
 3. Fix the HDD with screws (#6-32UNC), then close upper cover.	 4. Secure the frame by using the screws (M3-0.5).
 5. Connect the power cable to power supply and SATA cable to M/B.	The handle isn't in horizontal state when you push in.  6. Put the inner tray into outer frame & lock it.

Note: When you push the inner tray in, please raise the handle as horizontal state. While you can't push any longer, please put the handle down, then the inner tray will be connected to the outer frame at the same time.

Caution

1. Make sure the "Key Lock" is at position "Lock" after the installation of mobile rack.
2. If the HDD does not work after turning on the power of your PC, please check the "Power" and SATA connectors for any possible errors.



www.enermax.com.tw

©2004 Enermax Technology Co., Ltd. All Rights Reserved.

All logo and trademarks are registered to their respective owners.